

Data Article

Comparison of CO₂ emission between methanol and gasoline

ABSTRACT

The internal combustion engine, as a huge amount of global thermal machinery, serves a wide range of industries. At the present stage, internal combustion engines will still play an irreplaceable role for a longer period of time. Taking into account the trend of CO₂ emissions in China in recent years, this paper briefly analyzes the impact of adopting methanol fuel and traditional gasoline fuel on carbon emissions. The results show that the reasonable optimization of vehicle energy structure is very important to realize energy saving and emission reduction and reduce atmospheric CO₂ compared with traditional fuel vehicles.

Keywords: Methanol fuel; gasoline; CO₂ emission .

1. INTRODUCTION

With the progress and rapid development of China's market economy and information technology and the continuous improvement and increase of China's automobile resources, the serious clean energy and environmental issues are gradually becoming the focus of the world's attention, and low-carbon transportation will undoubtedly be an important way for countries around the world to solve the clean energy and environmental problems caused by the current global atmospheric temperature and regional environmental changes[1-4]. According to the statistics of the Traffic Management Bureau of China's Ministry of Public Security, in 2020, the number of new motor vehicles in the country will reach 372 million, including 281 million new cars[5]. According to the report, China's crude oil imports will be 10.87 million barrels per day (542 million tons) in 2020, with a foreign oil dependency of 73.5%[6]. In addition, motor vehicle exhaust is the main component that makes up the haze, and automobile exhaust is an increasingly serious problem for air pollution. Some compounds in vehicle exhaust, such as particulate matter, nitrogen oxides, SO₃, etc., not only cause serious pollution damage to the environment and air, but also may cause greater harm to people's health and lives[7]. Optimizing traditional fuels can effectively improve the emission of automobile exhaust, and using methanol fuel can effectively alleviate the problem of oil energy shortage in China on the one hand, and reduce the problem of environmental pollution on the other; promoting the use of methanol fuel has a positive effect on improving farmers' income, driving the development of agriculture and related industries, and increasing employment opportunities, etc[8]. It is the basic strategy of China's energy development to find the ideal fuel to replace petroleum and promote the diversification of fuels. China has abundant coal resources, and using coal resources as raw materials to manufacture methanol, especially for the poor quality coal that cannot become power coal for direct combustion, can be used as an important raw material to prepare methanol for clean use. The development strategy of using methanol instead of gasoline as fuel for vehicle engines can effectively reduce China's dependence on foreign oil imports, and the development strategy of methanol instead of gasoline is of great economic and social significance to improve China's energy consumption structure and refined oil consumption structure[9].

The trend of China's total carbon emissions in recent years is shown in Figure 1, by analyzing the database of China's total carbon emissions in recent years[10]. It can be seen that the general trend is that the total carbon emission has been showing an increasing trend, but through various energy-saving and emission reduction measures, the increasing trend of

China's carbon emission has become more moderate in the past ten years, which proves that the energy-saving and emission reduction measures adopted at present have an important role in reducing CO₂[11].

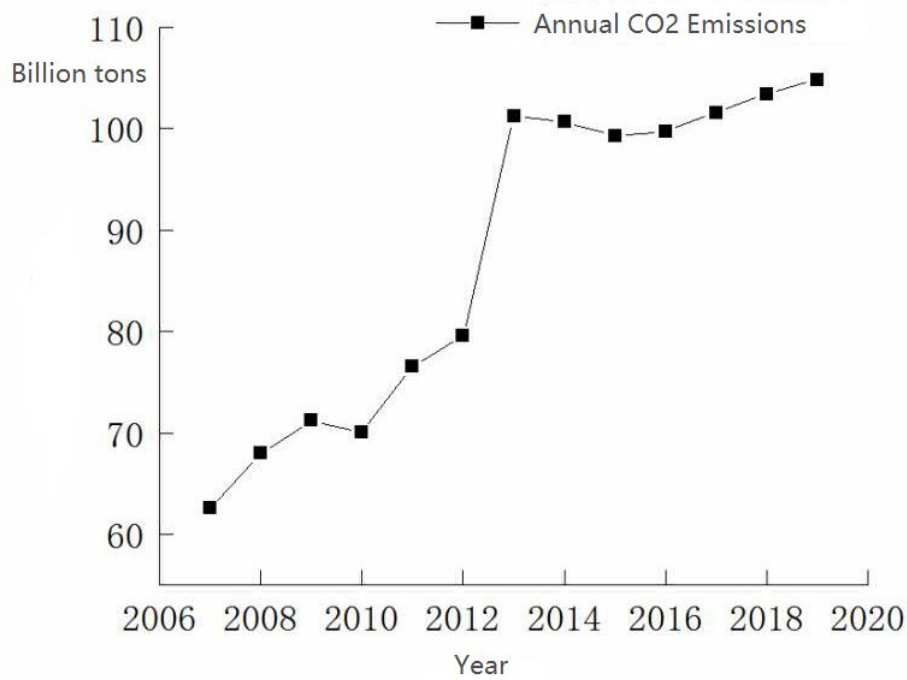


Fig. 1. China's total carbon emissions in recent years towards

2. RESEARCH METHODOLOGY

Automotive fuels are made from crustal resources through multiple complex industrial processes, and the process by which different raw materials are ultimately made into automotive fuels differs[12]. Gasoline is made from crude oil transported through pipelines through distillation and fractional distillation processes to eventually reach the gas station, while methanol is made from coal or natural gas through industrial coking and tertiary conversion[13]. The two forms of energy transfer using gasoline and methanol fuel are different and the process is shown in Figure 2.

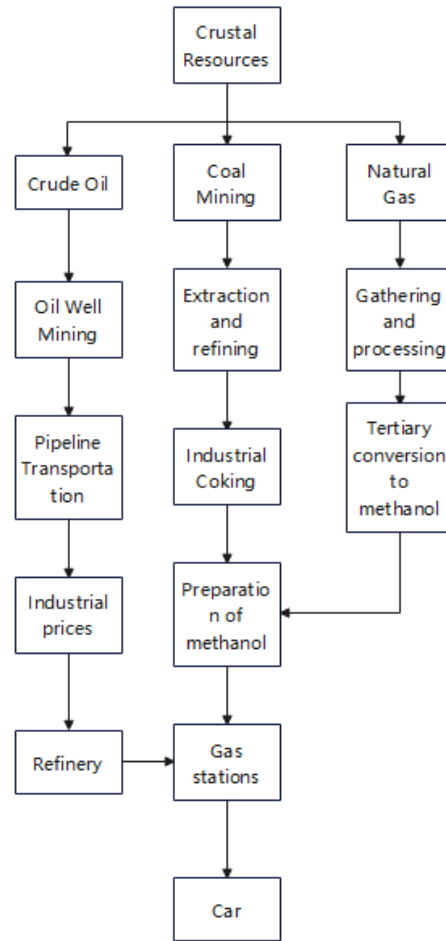


Fig. 2. Gasoline and methanol fuel energy transfer forms

In recent years, with the emergence of new energy vehicles, to a certain extent to alleviate the situation of energy tension, the most representative is the development of electric vehicles, but due to the lack of technical development, China's power battery technology development bottleneck problems encountered has not yet broken through, the core problem has not been solved, as the most widely used lithium-ion battery composition after the energy density is only 80wh/kg, the power supply system Performance is relatively backward[14]. Although China is a large producer of batteries, the country's power battery supporting enterprises more than hundreds of manufacturers throughout the country, but the core technology of power batteries do not have a competitive advantage, the production of power batteries required by the positive and negative electrode material technology patents have long been monopolized by foreign countries, diaphragm, electrolyte and other foreign highly dependent, the domestic battery production process performance is poor, the power battery composition technology is backward[15].

Although there have been new energy vehicles with Tesla and other major representatives, there are hydrogen energy cars, solar cars and electric cars, etc., but due to the current core technology development is not mature enough, resulting in its high production costs, low efficiency of electrical energy supply and can not achieve the ideal operation, or even greater energy consumption, which in turn increases the difficulty of promoting the use[16].

At present, some developed countries are speeding up the industrialization process of electric vehicles, and the market demand for electric vehicles is showing an increasing trend, but China's electric vehicles are still in the cultivation and development stage. Some domestic new energy vehicle enterprises have launched a series of different styles of new energy vehicles, but the models are mainly concentrated in the field of electric buses. The main focus is on the modification of the original model, which has failed to reach mass final production, and there are very few mass production models developed in the field of private passenger car passenger car prototypes, which are not much available for consumers to choose from[17].

And most cities lack operational infrastructure planning, especially the layout of infrastructure in public areas such as charging piles is restricted by many factors such as the selection of landing points, which is not conducive to the construction of an intelligent charging and switching service network system for electric vehicles[18]. The investment in charging and switching infrastructure service construction is huge and the recovery period is too long, coupled with the relative lack of subsidies from the national and local governments for infrastructure construction and the lack of

corresponding supporting policies for the operation of charging and switching facilities, social capital is not active enough, and few enterprises are willing to take the risk to try to develop in this area[19]. The technical system of charging facilities is not perfect, and the technical standards at the national level are relatively backward[20]. The lack of energy reserves in the power grid and the failure of power battery utilization and recycling technology make the lack of mutual operation certification between electric vehicles and charging and switching infrastructure[21].

In terms of the current development trend, rational optimization of the energy structure of vehicle engines is of positive significance for reducing energy consumption and addressing environmental issues. This study compares the CO₂ content in the exhaust gas of a domestic vehicle after adopting two different energy sources[22].

CO₂ content in the exhaust gas of a domestic vehicle after comparing the adoption of two different energy sources, and analyzing which specific energy situation is adopted, the vehicle has less CO₂ emission. A brief technical route of the study is shown in Figure 3.

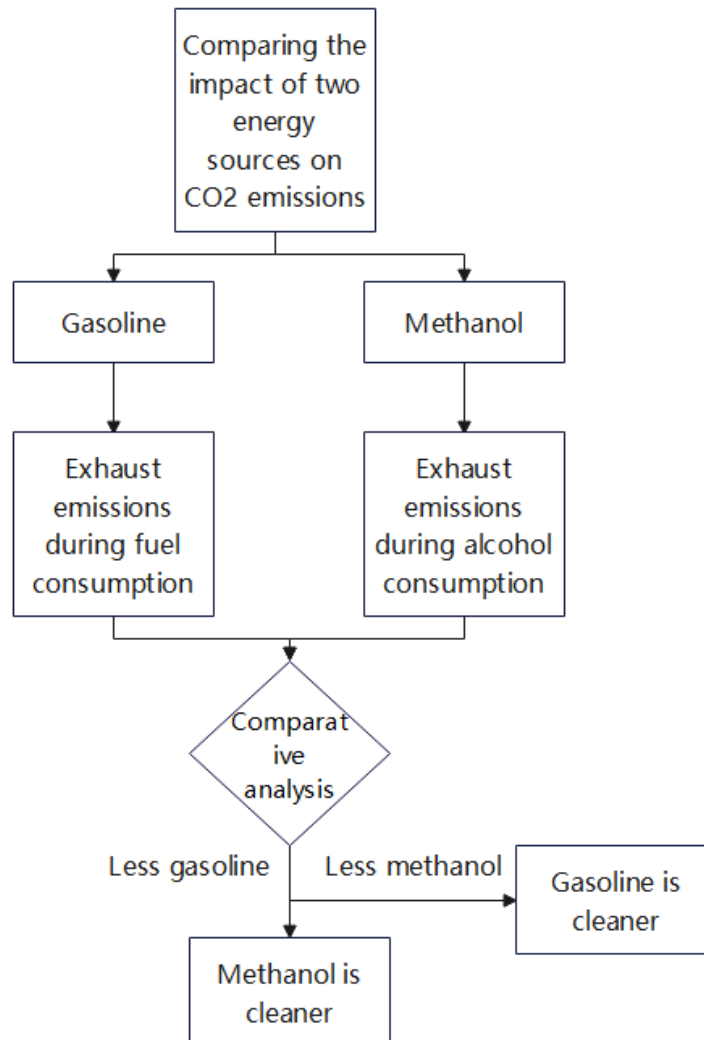


Fig. 3. Specific analysis process

By analyzing the relative amount of CO₂ in the tailpipe emissions of the C-Class when using different energy sources, the comparison was made to determine which of the products of combustion is relatively cleaner when using methanol or gasoline, and finally a conclusion was drawn to determine the cleaner energy source.

3. PERFORMANCE CHARACTERISTICS OF METHANOL FUEL

3.1 PHYSICAL AND CHEMICAL PROPERTIES OF METHANOL

Methanol is a colorless, transparent, highly volatile, flammable and water-soluble liquid. Methanol has the molecular formula CH₃OH and contains 50% of its own oxygen, which facilitates complete combustion of the fuel. The boiling point is 64.7°C, which is lower than gasoline and easy to mix with air; the ignition limit of methanol is 7.3%~36.9%, which is easier to ignite than gasoline; the octane number of methanol is 110, which is higher than gasoline and has good anti-

explosion property, which is conducive to improving the compression ratio of the engine and enhancing the efficiency; methanol is easily soluble in water, easily degradable and does not cause any damage to the soil. Methanol is easily soluble in water, easily degradable, and does not pollute soil and rivers; methanol is liquid at room temperature, so it is convenient to transport, store and refill.

3.2 METHANOL IS CORROSIVE TO SOME METALS

Methanol contains high oxygen content and has strong chemical activity. The oxidation of methanol produces trace amounts of organic acids, which cause acidic and electrochemical corrosion of some non-ferrous metals such as aluminum, copper, lead and zinc. Therefore, corrosion inhibitors, corrosion inhibitors, antioxidant stabilizers and other additives should be added to methanol fuel to weaken the corrosion effect on metals. Methanol combustion emissions of water vapor increased, in addition to acidic substances such as formic acid, the two together to accelerate the exhaust pipe, especially the corrosion of the weld, so the exhaust pipe should be molded as much as possible to reduce the welding technology.

3.3 METHANOL HAS A HIGH LATENT HEAT OF VAPORIZATION

The latent heat of vaporization of methanol is 1109kJ/kg, which is 3.7 times higher than that of gasoline (310 kJ/kg), and it needs to absorb more heat when vaporizing. After methanol enters the engine cylinder, the temperature inside the cylinder will drop, which further reduces the volatile energy of methanol and makes it difficult for the mixture to reach the minimum ignition limit, especially in winter when the low temperature causes starting difficulties. Some technical measures are needed to solve the problem of low temperature cold starting difficulty of methanol vehicles.

3.4 METHANOL PRODUCTION TECHNOLOGY IS MATURE AND ABUNDANT IN RESOURCES

China mainly adopts coal to produce methanol, which can not only be produced by high sulfur poor quality coal and coke oven gas, but also be co-produced by nitrogen fertilizer plant. Coal-based fuel methanol has the advantages of good fuel properties, abundant production raw materials, mature technology and basic production facilities of considerable scale already. Therefore, the use of methanol as an alternative fuel for transportation is in line with our national conditions and has good sustainability.

3.5 METHANOL HAS A SOLUBILIZING EFFECT ON RUBBER AND PLASTIC

Methanol is a polar organic solvent, which can make plastic parts swell and become sticky; make rubber parts swell, harden and become brittle and other early aging phenomena. The swelling effect of methanol makes the rubber and plastic parts in the fuel supply system age prematurely, causing poor sealing and oil leakage. Therefore, it is necessary to add anti-swelling agents to methanol fuel, and to use modified rubber and modified plastic parts with alcohol resistance. Such as sealing gasket using purple copper gasket; oil pump using strong methanol corrosion resistance phosphorus deoxidized copper as the oil pump rotor; oil tank and oil pipe to use alcohol-resistant rubber such as tetrapropylene fluorine rubber and neoprene; oil pump screen and bracket to use alcohol-resistant plastic, etc.

4. COMPARATIVE ANALYSIS OF CO₂ EMISSIONS OF VEHICLES USING DIFFERENT FUELS

By comparing the CO₂ emissions of C-Class cars with two different fuels, the CO₂ emissions per 1 mol of fuel burned completely under ideal conditions are investigated as follows.

4.1 CO₂ EMISSIONS FROM FUEL VEHICLES IN CIRCULATION

The increasing scale of motor vehicles is accelerating global energy consumption and greenhouse effect. At present, the issue of energy saving and emission reduction of automobiles has become a hot topic of discussion in many fields around the world. In response to the challenges posed by the energy crisis and the greenhouse effect, many countries have introduced measures to shift their traditional vehicle strategies.

According to the Global Economic Database, the overall calorific value of a fuel refers to the total amount of heat generated by the full combustion of 1kg of fuel.

Based on the calculation of atomic conservation, we can assume that the CO₂ produced by the complete combustion of 1 mol of octane is 8 mol, and the CO₂ produced in the ideal state is 2300g. In other words, the CO₂ produced by a car for every 1L/100km of gasoline burned is approximately $M1 = 23.0\text{g/km}$.

4.2 METHANOL VEHICLE CIRCULATION RANGE CO₂ EMISSIONS

The main difference between cars using methanol as the main fuel and conventional internal combustion locomotives is the power source, and methanol can be manufactured synthetically from coal, oil, natural gas, biomass, etc. The chemical calorific value of methanol fuel is about 1111kJ/kg and its molecular formula is defined as CH₄O, the simplest saturated mono-alcohol in structure. According to the calculation of atomic conservation, the CO₂ produced by the complete combustion of 1 mol of methanol is assumed to be 1 mol, and the density of methanol in an ideal state of 1L is calculated as 0.791 kg/L. The CO₂ produced by a car is about M₂=10.9g/km per 1L/100km of methanol combustion. The above brief analysis of CO₂ emissions from the use of gasoline and methanol is shown in Figure 4.

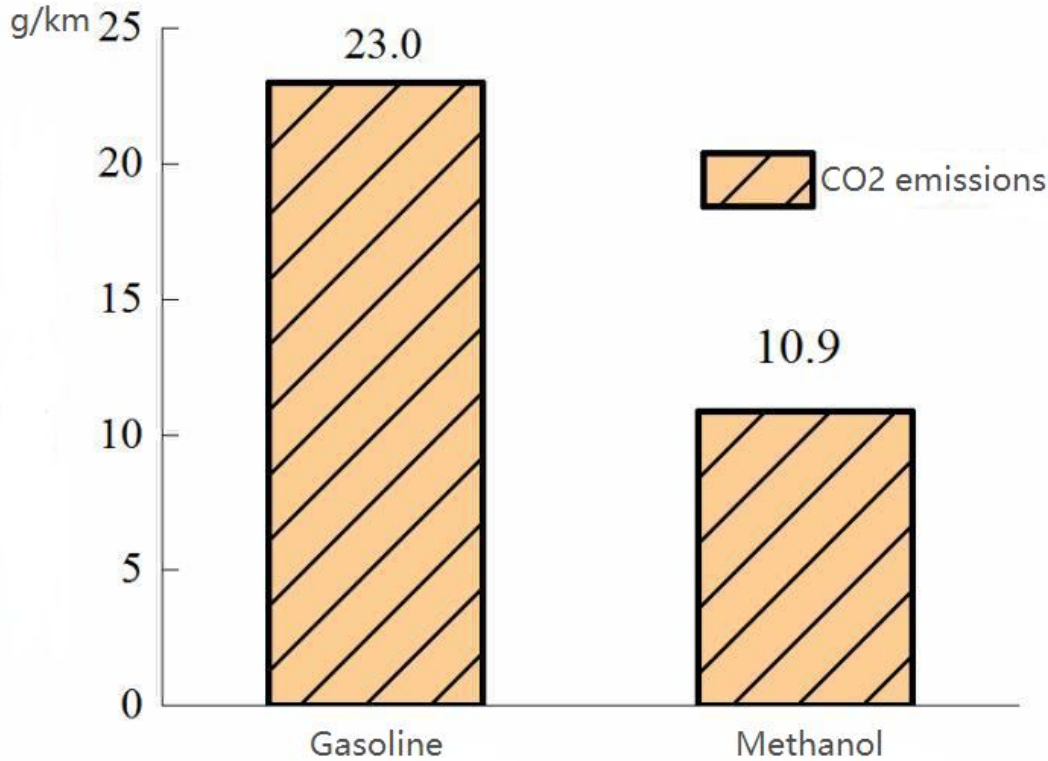


Fig. 4. CO₂ emissions when using two energy sources

Compared with traditional engines, the output power can be increased by 8-12% and the torque can be increased by 12-16% when using methanol engines, thus showing excellent aerodynamics. Methanol is easily soluble in water, easily degradable, and does not cause pollution damage to the environment such as soil and water flow, and it is chemically stable as a liquid at room temperature, so it is easy to transport and store. As an oxygenated compound, methanol can be fully combusted, and the combustion speed is faster than gasoline, and the combustion capacity is better, the combustion duration is shorter, and the latent heat of evaporation is larger, so the thermal efficiency of the engine can be improved. Methanol itself contains up to 50% oxygen, and the self-oxygenation effect occurs during the combustion process, thus reducing the chance of oxygen deficiency during the combustion process, which is conducive to the full combustion of the fuel, and also helps to achieve in-engine purification and reduce the generation of conventional gases such as CO, HC and NO_x, etc. The octane number of methanol is about 110, which is higher than that of gasoline, reflecting better anti-explosion properties, thus helping to improve the compression ratio of the engine. The energy utilization efficiency is better than that of conventional gasoline, and it has strong economy.

The advantages of methanol fuel, such as high thermal efficiency, strong thermal efficiency, good driveability, good starting function and economy, are important for reducing pollution, saving oil, safety and convenience. When using methanol as fuel, the ignition advance angle and injection advance angle can be adjusted to the best angle in order to obtain higher thermal efficiency and greater output power. Since the carbon content of methanol is lower than that of gasoline, the main components of the exhaust gas produced after full combustion in the cylinder are water vapor and CO₂, which do not contain sulfide, thus greatly reducing the emission of carbon particles and CO, which has less impact on the environment, and the manufacturing process of methanol can be refined by food crops, while promoting the development of modern agriculture in China.

5.CONCLUSION

The main conclusions from the above brief analysis are as follows:

- 1.The vehicle consumes methanol at a rate of 1L/100km and produces 10.9g/100km of CO₂ in the exhaust, while the gasoline consumption rate is 1L/100km and produces 23g/100km of CO₂ in the exhaust.
- 2.When methanol fuel is used, CO₂ emission in exhaust gas is less than that of conventional fuel vehicles, which is environmentally friendly and clean, and can lead to overall improvement of vehicle engine emissions.
- 3.Compared with conventional fuel cars, a reasonable choice of different energy mix and reduction of gasoline use have more positive significance for reducing CO₂ emissions.

The carbon content of methanol is 37.5%, density is 0.79kg/L, chemical calorific value is about 1111kJ/kg, gasoline contains 86.6% carbon, density is 0.742kg/L, chemical calorific value is about 44000k J/kg. Therefore, the carbon content of methanol is lower than gasoline per unit calorific value of fuel.

REFERENCES

1. Wang Jing-Tian, Ma Xiao-Ming. Progress and insights of low carbon transportation research[J]. Ecological Economy, 2021, 37(5): 57-64.
2. Chen Xiujuan. National car ownership reaches 281 million units[J]. Auto Watch, 2021(01):7.
3. Xu Qian. Analysis of the causes of imported crude oil transportation losses[J]. Chemical Engineering and Technology, 2021, 11(2): 82-87.
4. Chai Jing, Peng Cao. Causes of haze formation and its impact on human health [J]. World abstract of the latest medical information, 2017, 17(81): 128-129.
5. Chen Yanyan, Qin Weiling, Li Xiaoyi, et al. Research on monitoring and pollution characteristics of motor vehicle pollutant emissions from freight yard stations [J]. Journal of Chongqing Jiaotong University (Natural Science Edition), 2018, 37(09): 60-65.
6. Zhu Lingfeng, Fan Cailing, Liang Gengbai, et al. Study of methanol production from biomass syngas [J]. Journal of Zhengzhou University (Science Edition), 2004(3).GB/T 19233-2020, Test method for fuel consumption of light vehicles .
7. Tang Q., Wang T. I. Research on the problems and countermeasures of electric vehicle promotion and application [J]. Management Observation, 2015 (019): 86-88.
8. He L. Q. Study on China's motor vehicle greenhouse effect pollutant emission inventory and its reduction potential [D]. China Academy of Environmental Sciences, 2014.
9. Li M-D. Analysis and research on methanol fuel for new energy vehicles[J]. China Equipment Engineering (20): 2.
10. PatelC,TiwariN,AgarwalAK.Experimental investigations of soyabean and rapeseed SVO and biodiesels on engine noise, vibrations, and engine characteristics[J]. Fuel, 2019, 238: 86-97.
11. Satsangi D P, Tiwari N. Experimental investigation on combustion, noise, vibrations, performance and emissions characteristics of diesel/n- butanol blends driven genset engine[J]. Fuel, 2018, 221: 44-60.
12. Chiatti G, Chiavola O, Palmieri F. Vibration and acoustic characteristics of a city-car engine fueled with biodiesel blends[J]. Applied Energy, 2017, 185: 664-670.
13. Taghizadeh-Alisaraei A, Ghobadian B, Tavakoli-Hashjin T, et al. Characterization of engine's combustion-vibration using diesel and biodiesel fuel blends by time-frequency methods: A case study[J]. Renewable Energy, 2016, 95: 422-432.
14. Li G X, Gu F S, Wang T, et al. Investigation into the vibrational responses of cylinder liners in an IC engine fueled with biodiesel[J]. Applied Sciences,2017,7,717.
15. Du Danfeng, Jia Jinhang. Joint prediction of car ownership based on improved Compertz-PCA [J] Transportation Technology and Economics,2021,23 (1) : 47-53.
16. Cheng Qian, Liu Yan, Zeng Jian, et al. Study on the overall engine performance of methanol fuel engine for vehicles [J].
17. Zhong Rui. Performance optimization of CNG single-cylinder engine based on GT-Power [D] Chongqing: Chongqing Jiaotong University, 2010
18. Zhang Lei, Ge Xiaocheng, Yang Jie, et al. Optimization of natural gas engine parameters based on experimental design [J]. Journal of Chongqing University of Technology (Natural Science), 2020,34(3):22-28.
19. Liu Shengquan. Application technology of methanol fuel for vehicles [M]. Beijing: People's Traffic Press 2013.
20. Zhao Hongxue, Li Liao, Pang Zhifei, et al. Hydrogen fuel cell vehicle development status[J]. Transportation energy saving and environmental protection, 2020,16(04):11-15.
21. Yao Chunde. Theory and practice of diesel/methanol binary fuel combustion[M]. Tianjin:Tianjin University Press,2015.
22. Yang Zheng, Han Hongmei. Overview of fuel cell industry development in China[J]. Chemical Industry,2020,38(2): 21-28+33.

UNDER PEER REVIEW