

Influence of Spray Parameters of a UAV Sprayer on Droplet Size in Paddy Spraying

Abstract

Unmanned aerial vehicles (UAVs) have emerged as promising technologies for agricultural applications, including pesticide spraying in paddy fields. Droplet size is a critical factor influencing the effectiveness and efficiency of pesticide application. This study investigated the impact of various spray parameters of UAV sprayers on droplet size during paddy spraying. The experimental setup involved a UAV equipped with different nozzle types (flat fan nozzle, hollow cone nozzle and spinning disc nozzle), operating at varying forward speeds (2, 3, 4, 5 and 6 m s⁻¹) and spray heights (1, 1.5, 2, 2.5 and 3 m above the crop canopy). The results demonstrated that among the three operational parameters, the type of nozzle had a significant effect on the droplet size, whereas the forward speed and height of the spray were not significantly different. A larger droplet size was obtained for the flat fan nozzle, followed by the hollow cone and spinning disc nozzles. These findings provide valuable insights for optimizing UAV sprayer settings to achieve the desired droplet size distributions and improve pesticide application efficiency in paddy fields.

Keywords: UAV sprayer, Paddy, Type of nozzle and Droplet size.

Introduction

Pesticide application is a crucial aspect of paddy cultivation and is aimed at controlling pests and diseases. Traditional methods of pesticide application, such as manual spraying or tractor-mounted sprayers, can be labor intensive, time consuming, and inefficient. In recent years, unmanned aerial vehicles (UAVs) have emerged as promising alternatives for spraying pesticides in paddy fields. UAVs offer several advantages, including increased efficiency, precision, and reduced environmental impact.

Droplet size is a critical factor influencing the effectiveness and efficiency of pesticide application. Smaller droplets can penetrate the dense canopy of paddy plants more effectively, reaching target pests and diseases. However, excessive droplet drift can lead to off-target pesticide deposition, environmental contamination, and reduced pesticide efficacy. A larger droplet size leads to runoff and pesticide waste. Therefore, understanding the factors influencing droplet size in UAV-based paddy spraying is essential for optimizing pesticide

application practices. This study investigated the impact of various spray parameters of UAV sprayers, such as the type of nozzle, forward speed and spray height, on the droplet size during paddy spraying.

Materials and methods


UAV sprayer

Unmanned aerial vehicles are classified into three major types: quadcopters, hexacopters and octocopters. The quadcopter of the four arms has less stability during flight. It is small in size and has less payload capacity. Compared with all available technologies, octocopters are bulky and more expensive. Hence, it is suggested to use a hexacopter equipped with a sprayer system, as it is more stable during the spraying process than a quadcopter and is more economical than an octocopter (Susitra *et al.*, 2020). The hexacopter (Fig. 1) can be selected and modified for pesticide application. The components of the UAV sprayer are shown in Table 1.









Fig. 1: Hexacopter UAV sprayer

Table 1. Components and images of selected UAV sprayer

Sl. No.	Components	Images
1	Fuselage	

2	Landing gear	
3	Arms	
4	Lithium polymer battery	
5	Propeller	
6	Brushless DC (BLDC) motor	
7	Electronic speed controller	
8	Power distribution board	
9	Remote controlled transmitter	

10	Receiver	
11	Flight controller	
12	Global positioning system	
13	Pump motor	
14	Nozzles	
15	Chemical tank	

Experimental Setup

The study was conducted at the farmer's field (Hosur village, Raichur District), and a 1000 m² area was marked in the paddy field to carry out the trials (Fig. 2). A hexacopter UAV sprayer was used for the experiments. The three different types of nozzles that were tested were flat fans, hollow cones, and spinning disc nozzles (Table 2) with 100% openings. The

forward speed and height of the spray of the UAV sprayer were varied during the experiments according to **the** Taguchi L-25 orthogonal experimental design (Table 3).

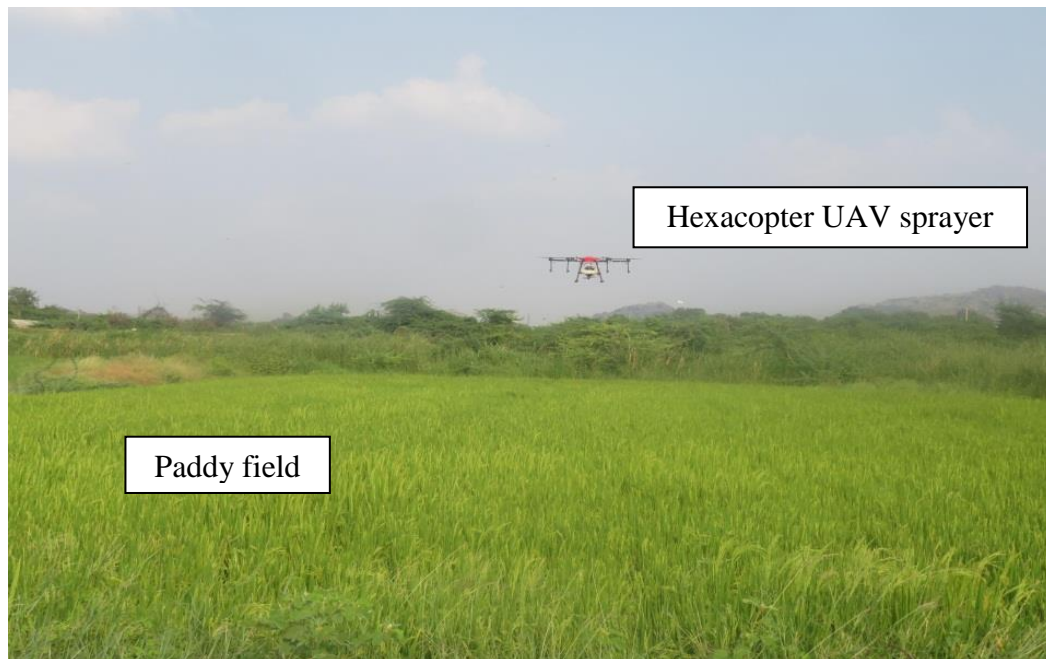


Fig. 2: Operating UAV sprayer over a paddy crop in the farmer's field to record droplet size

Table 2. Three types of nozzles selected for the study

Sl. No.	Type of nozzle	Nozzle view
1	Flat fan nozzle	


2	Hollow cone nozzle	
3	Spinning disc nozzle	

Table 3. Taguchi L-25 orthogonal experimental design for recording droplet size produced by various nozzle types attached to a UAV sprayer

Experiment No.	Type of nozzle	Forward speed (m s ⁻¹)	Height of spray (m)
1	Flat fan nozzle	2	1
2	Flat fan nozzle	3	1.5
3	Flat fan nozzle	4	2
4	Flat fan nozzle	5	2.5
5	Flat fan nozzle	6	3
6	Flat fan nozzle	2	1.5
7	Flat fan nozzle	3	2
8	Flat fan nozzle	4	2.5
9	Flat fan nozzle	5	3
10	Flat fan nozzle	6	1
11	Hollow cone nozzle	2	2

12	Hollow cone nozzle	3	2.5
13	Hollow cone nozzle	4	3
14	Hollow cone nozzle	5	1
15	Hollow cone nozzle	6	1.5
16	Spinning disc nozzle	2	2.5
17	Spinning disc nozzle	3	3
18	Spinning disc nozzle	4	1
19	Spinning disc nozzle	5	1.5
20	Spinning disc nozzle	6	2
21	Spinning disc nozzle	2	3
22	Spinning disc nozzle	3	1
23	Spinning disc nozzle	4	1.5
24	Spinning disc nozzle	5	2
25	Spinning disc nozzle	6	2.5

Droplet size measurement

Nozzles produce droplets of various sizes ranging from very fine ($<60\ \mu$) to ultracoarse ($>665\ \mu$). It is essential to choose the right nozzle to reduce spray drift and obtain maximum coverage simultaneously. Droplet sizes are usually measured in microns (micrometers). One micron equals 0.001 mm. The micron is a useful unit of measurement because it is small enough that whole numbers can be used in drop size measurement. By cutting a droplet in half, we can produce eight times the number of droplets. Hence, with the same amount of chemical, we can increase the area of coverage by reducing the droplet size. A nozzle with a coarse or very coarse droplet is usually selected to minimize off-target spray drift, whereas a nozzle with a fine droplet is required to obtain maximum surface coverage of the target plant.

The size of the spray droplet is represented as the volume median diameter (VMD). The volume median diameter (VMD) is the midpoint droplet size, where half of the volume of spray contains droplets larger than the VMD in μm and the other half contains droplets

smaller than the VMD. To reduce experimental error, water-sensitive papers (7.6 cm × 2.6 cm) were placed at the upper and lower leaf surfaces at the top, middle and bottom canopies of the paddy plants to record the droplet size received from the spraying nozzle.

A total of three paddy plants (three replications) were selected for each trial, and WSPs were carefully placed on the paddy leaves (Fig. 3). In particular, six WSPs were used per paddy plant. The droplets result in blue deposits when deposited on the WSPs. The WSPs were carefully removed with clean tweezers and sealed in Ziploc bags after spraying. The collected WSPs were qualitatively analyzed to determine droplet size (Tang *et al.*, 2018).



Fig. 3: Placement of water-sensitive paper to collect spray droplets for measuring droplet size

Data processing

The WSPs were scanned into a digital image with a high pixel resolution (600 dpi × 600 dpi). The droplet size on the WSPs was evaluated via Deposit Scan software (Tang *et al.*, 2018).

Statistical analysis

A Taguchi L-25 orthogonal experimental design was used to evaluate the individual effects of nozzle type, forward speed and spray height on droplet size. Minitab 19 was used for analyzing the data (Yang and Tang, 1998). A Pareto chart was generated to indicate the

most significant parameter among the selected independent variables on the basis of the standardized effect values at the 5% level of significance.

Results and Discussion

Influences of the type of nozzle, forward speed and height of spray on the droplet size collected from paddy leaves

The Pareto chart determines the magnitude and importance of the effects of the operational parameters on the performance parameters. On the Pareto chart, bars that cross the reference line (2.09) are statistically significant at the 0.05 level. The Pareto charts for the droplet sizes at the top, top, middle upper, middle lower, bottom upper and bottom under the surfaces of the paddy leaves are presented in Figs. 4, 5, 6, 7, 8 and 9, respectively.

Influence of nozzle type

The Pareto chart (Figs. 4 to 9) revealed that the nozzle type significantly influenced the droplet size. The spinning disc nozzle produced smaller droplets, followed by hollow cone nozzles and flat fan nozzles, because flat fan, hollow cone and spinning disc nozzles have varying orifice sizes and discharge rates, which affect mainly the droplet size produced from the nozzle (Houston, 2022). Similar results were obtained for droplet size at the upper and lower surfaces of the top, middle and bottom canopies of paddy leaves.

Effect of forward speed

The droplet size did not change significantly with forward speed. This was in agreement with the results of Martin *et al.* (2019). Similar results were observed for droplet size at the upper and lower surfaces of the top, middle and bottom canopies of paddy leaves.

Effect of spray height

The droplet size on the paddy leaves was not significantly related to the height of the spray above the crop canopy at the upper and lower surfaces of each canopy. However, the downwash air flow of the drone-mounted sprayer breaks up the droplets into smaller sizes. This may be because when the height of the spray increases, it leads to increased air turbulence, longer travel distances and greater exposure to air currents, but it does not significantly change the average droplet size (Houston, 2022).

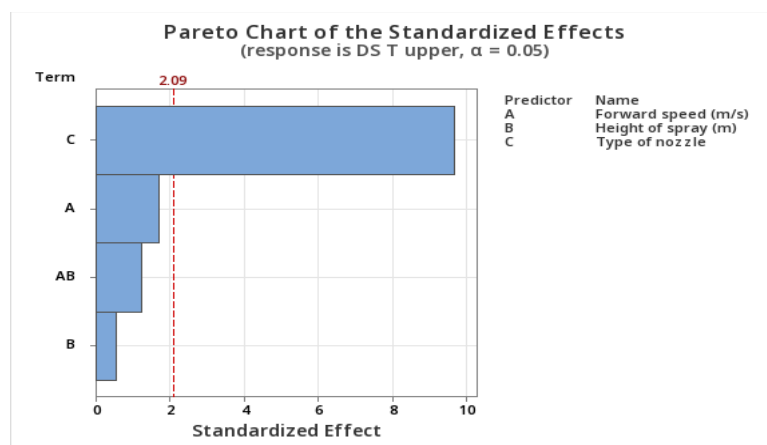


Fig. 4. Pareto chart of the standardized effects of the type of nozzle, forward speed and height of the spray on the droplet size at the top upper surface of paddy leaves

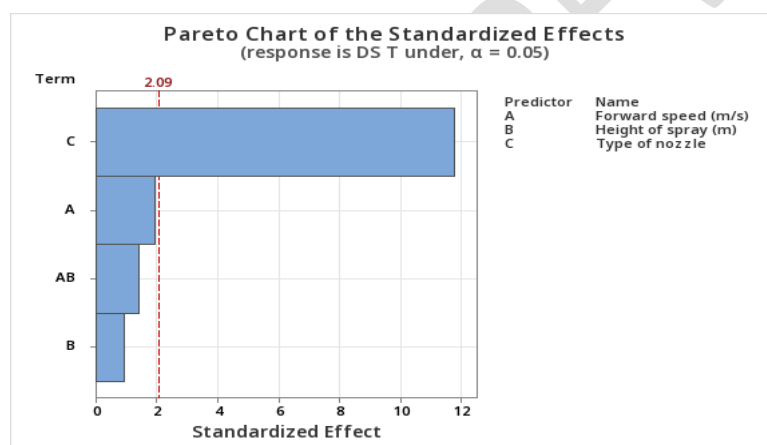


Fig. 5. Pareto chart of the standardized effects of the type of nozzle, forward speed and height of the spray on the droplet size at the top under the surface of the paddy leaves

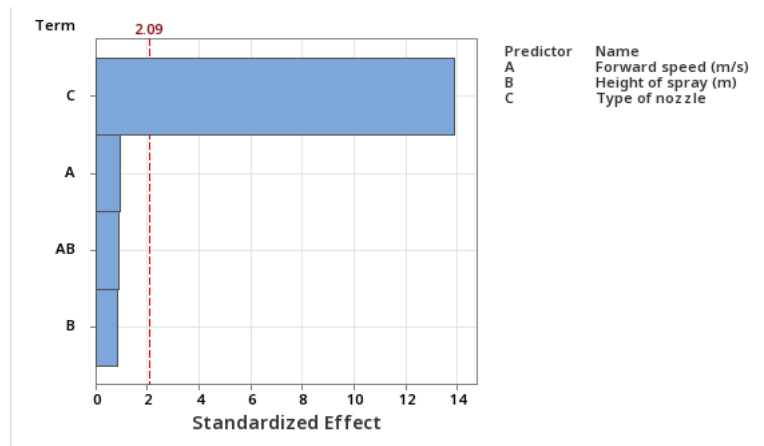


Fig. 6. Pareto chart of the standardized effects of the type of nozzle, forward speed and height of the spray on the droplet size at the middle upper surface of the paddy leaves

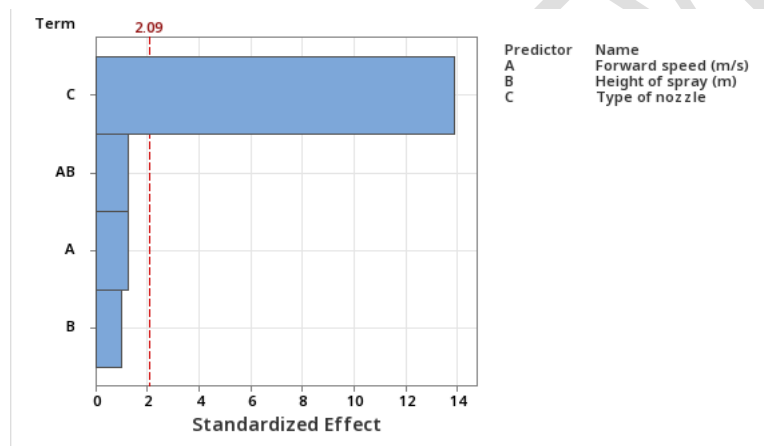


Fig. 7. Pareto chart of the standardized effects of the type of nozzle, forward speed and height of the spray on the droplet size in the middle of the surface of the paddy leaves

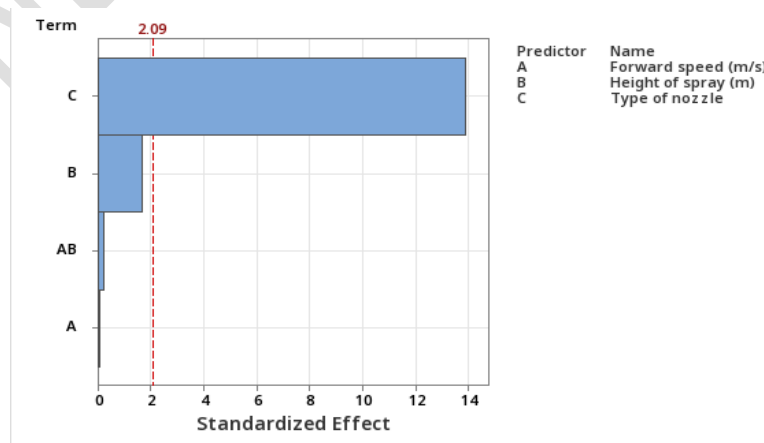


Fig. 8. Pareto chart of the standardized effects of the type of nozzle, forward speed and height of the spray on the droplet size at the bottom upper surface of the paddy leaves

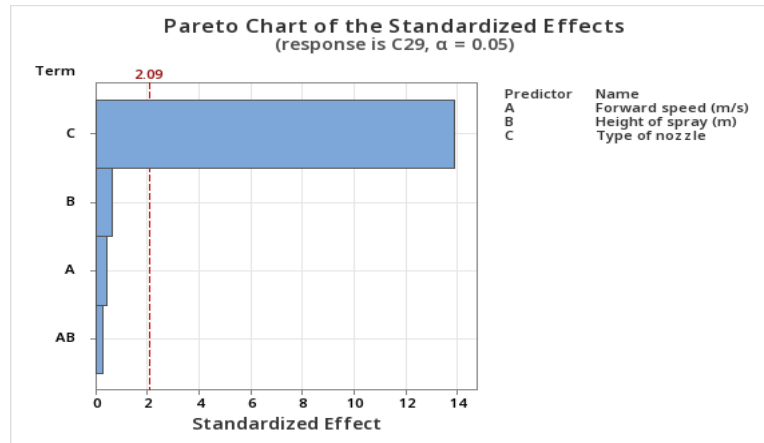


Fig. 9. Pareto chart of the standardized effects of the type of nozzle, forward speed and height of the spray on the droplet size at the bottom under surface of the paddy leaves

Main effects plot for means

The main effects plot for means (Figs. 10 to 15) describes the mean values of the performance parameter along with the individual response of the operational parameters. The highest mean value of droplet size on the top upper leaves of the paddy crop (Fig. 10) was observed with the combination of a flat fan nozzle, 2 m s^{-1} forward speed and 1.5 m height of spray, whereas the lowest mean value of droplet size on the top upper leaves of the paddy crop was observed with the combination of a spinning disc nozzle, 6 m s^{-1} forward speed and 3 m height of spray. The main effect plots for droplet size at the top, middle upper, middle lower, bottom upper and bottom under the surfaces of the paddy leaves are presented in Figs. 11, 12, 13, 14 and 15, respectively.

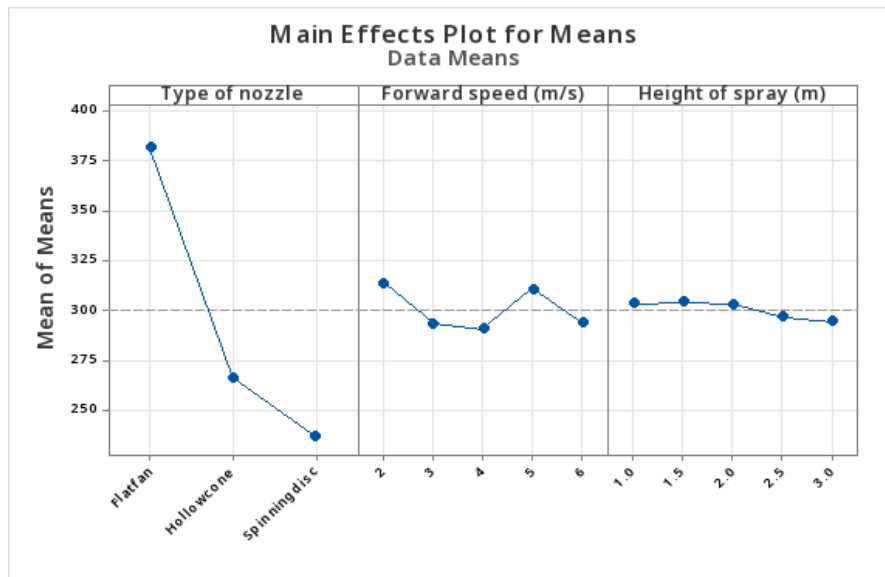


Fig. 10. Main effects plot for means of operational parameters on droplet size at the top upper surface of paddy leaves

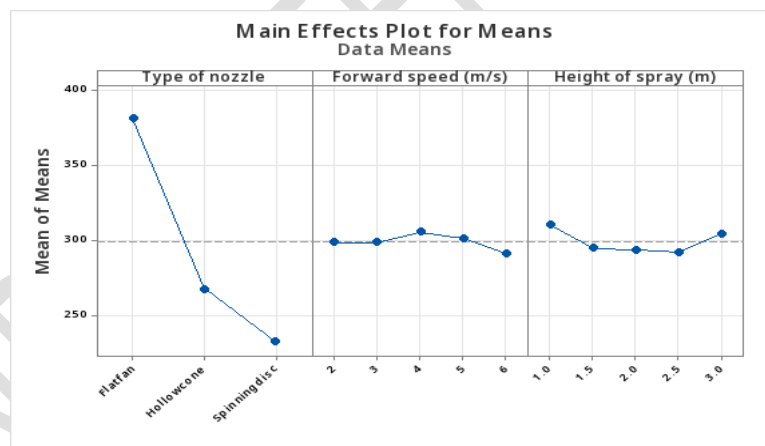


Fig. 11. Main effects plot for means of operational parameters on droplet size at the top under surface of paddy leaves

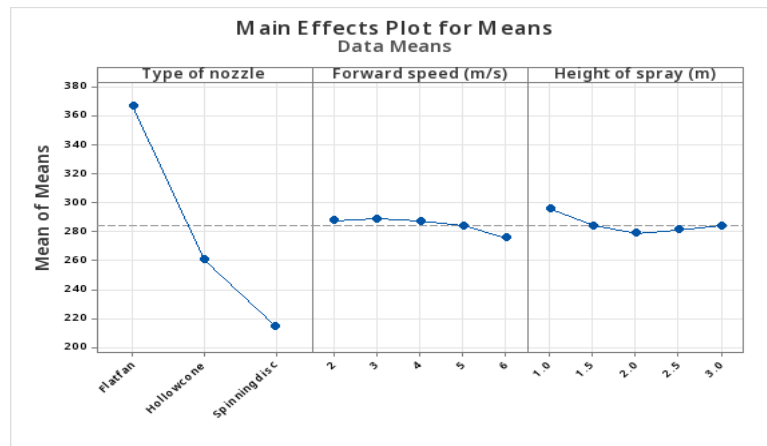


Fig. 12. Main effects plot for means of operational parameters on the droplet size at the middle upper surface of paddy leaves

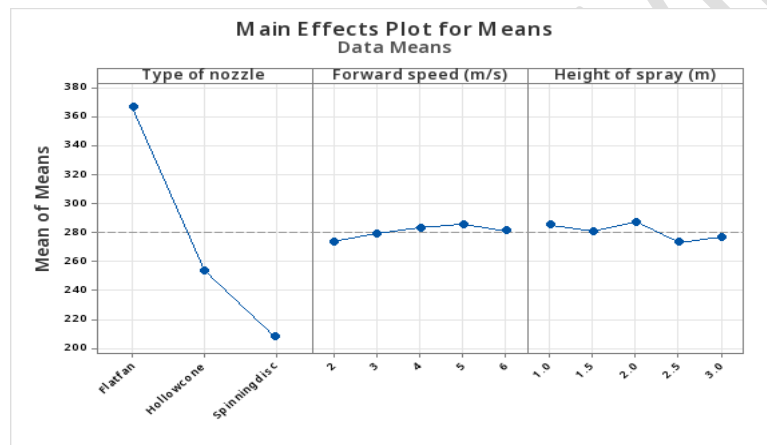


Fig. 13. Main effects plot for means of operational parameters on droplet size at the middle under surface of paddy leaves

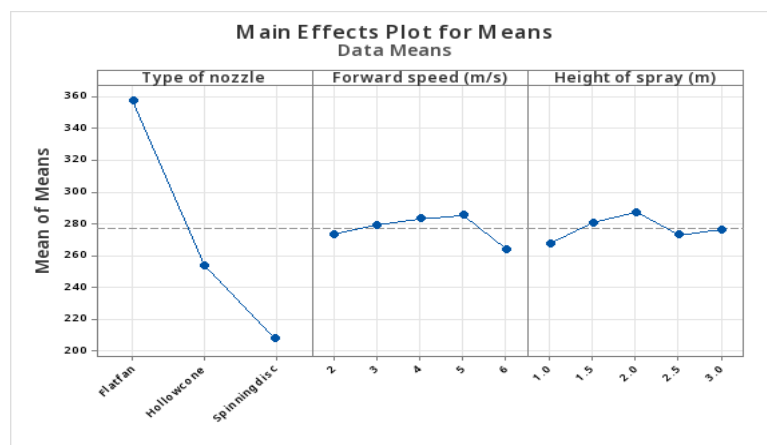


Fig. 14. Main effects plot for means of operational parameters on the droplet size at the bottom upper surface of paddy leaves

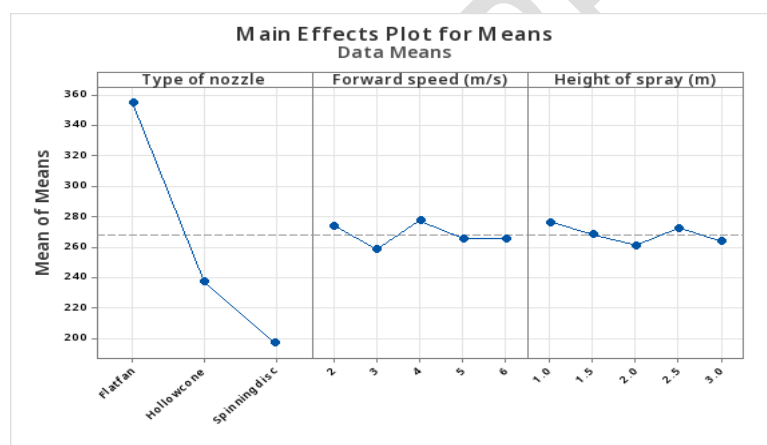


Fig. 15. Main effects plot for means of operational parameters on the droplet size at the bottom under surface of paddy leaves

Conclusion

Experiments were conducted to determine the impact of the operational parameters (nozzle type, forward speed and spray height) of the UAV sprayer on the droplet size in paddy fields. This study concludes that the type of nozzle used on the UAV sprayer significantly influences the droplet size during paddy spraying, with flat fan nozzles producing the largest droplets, followed by hollow cone nozzles and spinning disc nozzles. In contrast, the forward speed and spray height had no significant effect on the droplet size. These findings suggest that selecting the appropriate nozzle type is crucial for optimizing pesticide application efficiency and minimizing drift in paddy fields.

Disclaimer (Artificial intelligence)

Option 1:

Author(s) hereby declare that NO generative AI technologies such as Large Language Models (ChatGPT, COPILOT, etc.) and text-to-image generators have been used during the writing or editing of this manuscript.

Option 2:

Author(s) hereby declare that generative AI technologies such as Large Language Models, etc. have been used during the writing or editing of manuscripts. This explanation will include the name, version, model, and source of the generative AI technology and as well as all input prompts provided to the generative AI technology

Details of the AI usage are given below:

- 1.
- 2.
- 3.

References

1. Al Heidary, M., Douzals, J. P., Sinfort, C., and Vallet, A. 2014, Influence of spray characteristics on potential spray drift of field crop sprayers: a literature review. *Crop Prot.* 63, 120–130. doi: 10.1016/j.cropro.2014.05.006.
2. Chen, P., Douzals, J.P., Lan, Y., Cotteux, E., Delpuech, X., Pouxviel, G. and Zhan, Y., 2022, Characteristics of unmanned aerial spraying systems and related spray drift: A review. *Frontiers in Plant Science*, 13, 870956.
3. Chen, S., Lan, Y., Zhou, Z., Ouyang, F., Wang, G., Huang, X., Deng, X. and Cheng, S., 2020, Effect of droplet size parameters on droplet deposition and drift of aerial spraying by using plant protection UAV. *Agronomy*, 10(2):195.
4. Desa, H., Azizan, M.A., Zulkepli, N.N., Ishak, N., Tian, T.Y., Yahya, S.S., Shahrazel, A.A.M., Mansor, F.M., Aziz, S.Z.A. and Hussain, A.S.T., 2023, Spraying dispersion analysis with different nozzle types using a UAV spraying system in a paddy field.
5. He, Y., Xiao, S., Fang, H., Dong, T., Tang, Y., Nie, P., *et al* 2018, Development situation and spraying decision of spray nozzle for plant protection UAV. *Transac. Chin. Soc. Agric. Eng.* 34, 113–124. doi: 10.11975/j.issn.1002-6819.2018.13.014
6. Herbst, A., Bonds, J., Wang, Z. C., Zeng, A. J., He, X. K., and Goff, P. 2020, The influence of unmanned agricultural aircraft system design on spray drift. *J. Kulturpfl.* 72, 1–11. doi: 10.5073/JfK.2020. 01.01
7. Houston, T., 2022, Optimization of nozzle, application height and speed for UASS pesticide applications.
8. Hu, H., Ren, X., Ma, X., Li, H., Ma, Y., Wang, D., Song, X., Meng, Y. and Ma, Y., 2021, Control effect on cotton aphids of insecticides sprayed with unmanned aerial vehicles under different flight heights and spray volumes. *Int. J. Precis. Agric. Avi.*, 4(1).
9. Jeevan, N., Pazhanivelan, S.E.L.L.A.P.E.R.U.M.A.L., Kumaraperumal, R.A.M.A.L.I.N.G.A.M., Ragunath, K.A.L.I.A.P.E.R.U.M.A.L., Arthanari, P.M., Sritharan, N., Karthikkumar, A. and Manikandan, S., 2023. Effect of different spray volumes on deposition characteristics of a fuel-operated UAV Sprayer using herbicides in transplanted rice (*Oryza sativa*). *Indian J. Agric. Sci.* 93, pp.720-725.
10. Khoshnam, F. 2022, Analysis of nozzle spray distribution for different nozzle height and pressure. *Agric. Eng. Int., CIGR Journal*, 24(1).
11. Lan, Y., Qian, S., Chen, S., Zhao, Y., Deng, X., Wang, G., Zang, Y., Wang, J. and Qiu, X., 2021, Influence of the downwash wind field of plant protection UAV on

- droplet deposition distribution characteristics at different flight heights. *Agronomy*, 11(12): 2399.
12. Lv, M., Xiao, S., Yu, T. and He, Y., 2019, Influence of UAV flight speed on droplet deposition characteristics with the application of infrared thermal imaging. *Int. J. Agric. Biol. Eng.*, 12(3): 10-17.
 13. Martin, D. E., Woldt, W. E. and Latheef, M. A., 2019, Effect of application height and ground speed on spray pattern and droplet spectra from remotely piloted aerial application systems. *Drones*, 3(4): 83.
 14. Mat Su, A.; Yahya, A.; Mazlan, N.; Hamdani, M.S.A. Evaluation of the spraying dispersion and uniformity using drone in rice field application. In Proceedings of the 2018 Msae Conference, at Faculty of Engineering, Universiti Putra Malaysia, Selangor, Malaysia, 7–8 February 2018; pp. 1–4.
 15. Nordin, M. N., Jusoh, M. S. M., Bakar, B. H. A., Ahmad, M. T., Mail, M. F., Vun, C. T., Chuang, T. C., Basri, M. S. H. and Zolkafli, A. K., 2021, Study on water distribution of spraying drone by different speed and altitude. *Adv. Agric. Food. Res. J.*, 2(2).
 16. Rao, G. M., Prasanna, B. L., Katuri Rayudu, V. Y. K., Thrinath, B. V. S., & Gopal, T. V. (2024). Performance evaluation of BLDC motor drive mounted in aerial vehicle (drone) using adaptive neuro-fuzzy. *International Journal of Power Electronics and Drive Systems (IJPEDS)*, 15(2), 733-743.
 17. Susitra, D., Jebaseeli, E. A. E., Chitturi, V. K. and Chadalavada, V., 2020, Design and development of an Hexacopter for fertilizer spraying in agriculture fields. *Journal of Physics: Conference Series*. 1706 (1): 012053.
 18. Tang, Y., Hou, C. J., Luo, S. M., Lin, J. T., Yang, Z. and Huang, W. F., 2018, Effects of operation height and tree shape on droplet deposition in citrus trees using an unmanned aerial vehicle. *Comput. Electron. Agric.*, 148: 1-7.
 19. Wang, L., Xia, S., Zhang, H., Li, Y., Huang, Z., Qiao, B., Zhong, L., Cao, M., He, X., Wang, C. and Liu, Y., 2024. Tank-mix adjuvants improved spray performance and biological efficacy in rice insecticide application with unmanned aerial vehicle sprayer. *Pest Management Science*.
 20. Wongsuk, S., Qi, P., Wang, C., Zeng, A., Sun, F., Yu, F., Zhao, X. and Xiongkui, H., 2024. Spray performance and control efficacy against pests in paddy rice by UAV-based pesticide application: effects of atomization, UAV configuration and flight velocity. *Pest Management Science*, 80(4), pp.2072-2084.

21. Yallappa, D., Kavitha, R., Surendrakumar, A., Suthakar, B., Kumar, A.M., Kalarani, M.K. and Kannan, B., 2023. Effect of downwash airflow distribution of multi-rotor unmanned aerial vehicle on spray droplet deposition characteristics in rice crop. *CURRENT SCIENCE*, 125(2), p.172.
22. Yang, W. H. and Tarng, Y. S., 1998, Design optimization of cutting parameters for turning operations based on the Taguchi method. *J. Mater. Process Technol.*, 84: 122-129.
23. Yongjun, Z.; Shenghui, Y.; Chunjiang, Z.; Liping, C.; Lan, Y.; Yu, T. Modelling operation parameters of uav onspray effects at different growth stages of corns. *Int. J. Agric. Biol. Eng.* 2017, 10, 57–66.
24. Yuan H. Z. and Wang G. B., 2015, Effects of droplet size and deposition density on field efficacy of pesticides, *Plant Prot.*, 6 (2):9-6,
25. Zhang, S., Qiu, B., Xue, X., Sun, T., Gu, W., Zhou, F. and Sun, X., 2021, Effects of crop protection unmanned aerial system flight speed, height on effective spraying width, droplet deposition and penetration rate, and control effect analysis on wheat aphids, powdery mildew, and head blight. *Appl. Sci.*, 11(2): 712.
26. Zhu, H., Salyani, M. and Fox, R.D., 2011, A portable scanning system for evaluation of spray deposit distribution. *Computers and Electronics in Agriculture*, 76(1): 38-43.