

COMPARATIVE STUDY OF THE ADSORPTION OF LEAD AND CADMIUM BY ACTIVATED CARBON FROM JATROPHA CACUS AND MORINGA HUSK

ABSTRACT

Moringa husks and Jatropha cactus were evaluated using decoloration of methylene blue for the removal of lead (Pb) and cadmium (Cd) from water sample. The results showed that Moringa has better properties: physicochemical properties: pH, moisture content (%), ash content (%), carbon content (%), volatile matter (%), surface area (m²/g), electrical conductivity (μs/cm), bulk and density (g/L), 6.4, 14, 4, 63.26, 10, 787, 867 and 400 respectively, decoloration of methylene blue at 10 to 90 minutes ranges from 11 to 87 % , Pb and Cd adsorption capacity 55.7 and 86, % degradation 85 and 92 than the Jatropha cactus 50.2 and 55.2, 78 and 83 respectively. The Moringa husk was characterized using Fourier Transform Infrared (FTIR), Scanning Electron Microscope (SEM) and its adsorption properties were studied by Langmuir and Freundlich kinetic isotherms

Keywords: Activated carbon, Adsorption, Jatropha cactus, Moringa husks, Methylene blue

Introduction

Water is the basic component of life; therefore it is important that people should be concerned about the nature of their drinking water especially the classification, evaluation of water weather fit for consumption, physical and chemical properties of the water (Abou El-Hassan *et al.*, 2009). Although most health problems relating to water can be as a result of pathogens, inorganic elements such as cadmium, lead, arsenic and mercury e.t.c. (Pan *et al.*, 2010)

Water pollution by heavy metal has been recorded as a major problem in the global context. It occurs due to the direct and indirect discharge of diverse chemicals in to the water bodies without sufficient treatment to reduce and diminish the harmful compound (Alfarra *et al.*, 2014). Pollution of surface and ground water caused by human and industrial activities has been recorded as a major problem in the global context (Satya *et al.*, 2011). Water pollution considered as the leading universal cause of 80 % of diseases (OECD, 2006). According to the United Nation Organization reports that there 1.1 billion people still do not have access to safe supply of drinking water, the majority of them are among the world's poorest and developing countries (Abaliwano *et al.*, 2008)

Chemicals from industrials are usually discharged directly or indirectly with partial or no treatment in to water bodies (Salim *et al.*, 2008). Heavy metals even as trace are harmful to human and other living organisms as they tend to accumulate in the tissue of the living organisms (Roa *et al.*, 2010)

Every day thousands of chemicals are discharged directly and indirectly in to water bodies without further treatment for elimination of the included harmful compound (Salim *et al.*, 2008). Heavy metals are without doubt as the most hazardous and harmful metals even if they present as traces, since they accumulate in the tissue of living organisms (Rao *et al.*, 2010)

Moringa oleifera is a multipurpose tree with variety of applications including coagulant in water treatment. Research has shown that the husk can be converted in to activated carbon by carbonization and activating process. (Warhust *et al.*, 1997)

The aim of the research work is to produce activated carbon from *Jatropha cactus* and *Moringa* husks, evaluated using decoloration of methylene blue and the best activated carbon will be used in the removal of lead and cadmium from water sample obtained from Hunkuyi Dam, Kaduna State which serves as a means of converting agricultural waste in to useful material

METHOD

Study area

The study area is National Research Institute for Chemical Technology (NARICT) Zaria, Basawa Town in Sabongari Local Government Area of Kaduna State in Northern Nigeria where plantations of both the *Jatropha* and *Moringa* are situated in the institute and the water sample was collected from Hunkuyi Dam during dry and raining season, 2019.

Preparation of the precursor material

Jatropha cactus and *Moringa* husk was collected from National Research Institute for Chemical Analysis (NARICT) was washed thoroughly with water, sun drying for 1 hour, crushing and sieving in to workable particles size. The samples was kept in a clean container for carbonization and analysis

Chemicals and impregnating agent

All the chemicals used were of analytical grade. The impregnating agent for the chemical activation of *Moringa* husk and *Jatropha cactus* was phosphorus acid (H_3PO_4)

Chemical Activation and carbonization

The sample materials were carbonized in the absence of air in a muffle furnace at a temperature 550°C for 60 minutes and the 200 g of carbonized sample was mixed with an aqueous solution of phosphoric acid (Activating

agent). The mixture was then subjected to heat at a temperature of 120 °C for 3 hours to vaporize the water. The dried mixture was subjected to heat at a temperature of 650 °C in a muffle furnace to enable activation of the pores of the carbon sample

Determination of moisture content

Thermal drying method was used in the determination of moisture content of the sample. 1.0 g of dried activated carbon was weighed in triplicate and placed in crucible, washed, dried and weighed crucible. The crucibles was then placed in an oven and dried at 105 °C to constant weight for 4 hours according to the method of (Rengaraj *et al.*, 2002)

The percentage moisture content was calculated as:

$$\text{Moisture (\%)} = \frac{\text{loss in weight on drying (g)}}{\text{initial sample weight (g)}} \times 100 \quad (1.1)$$

Determination of ash content

Crucibles was oven washed, oven dried at 105 °C and allowed to cool at room temperature in a desiccator. The crucible was weighed and 1.0 g of the sample introduced and placed in muffle furnace until the temperature rose to 500 °C maintained for 3 hours, then finally cooled in desiccator, reweighed to determine the ash content of the sample.

The percentage ash content was calculated using equation 1.2

$$\text{Ash (\%)} = \frac{\text{Ash weight (g)}}{\text{Oven dry weigh (g)}} \times 100 \quad (1.2)$$

Adsorption capacity

2.0 g of the prepared activated carbon was added to 100 ml raw water shake thoroughly and allow to stand for the period of an hour to establish adsorption-desorption equilibrium, filtered and then analyze the presence of lead, pb and cadmium, cd both before and after the interaction with the activated carbon using adsorption spectroscopy.

The adsorption capacity was calculated using the equation below

$$Q_t = \frac{(C_i - C_t)V}{w} \quad (1.3)$$

Where:

Q_t = adsorption capacity at time, t (mg/g)

C_i = concentration of metal before interaction with the activated carbon (mg/L)

C_t = concentration of metal after interaction with the activated carbon (mg/L)

V = volume of the effluent (L)

W = weight of the activated carbon (g) (Hameed, 2009)

Surface area of the activated carbon

The specific surface area of the prepared activated carbon was determined using Sear's method by agitating 1.5 g of the activated carbon sample in 100 ml diluted hydrochloric acid at pH = 3, 30 g of sodium chloride was added while stirring the suspension, then the volume was made up to 150 ml using de-ionized water. The solution was titrated with 0.1N sodium hydroxide to raise the pH from 4 to 9 and the volume recorded

The surface area was calculated below

$$S = 32V - 25 \quad (1.4)$$

Where:

S = Surface area of the activated carbon

V = volume of sodium

Scanning electron microscope (SEM) analysis

Scanning electron microscopy (SEM) analysis: A Hitachi X-650 scanning electron micro-analyzer was used to take the micrographs of the samples, at an accelerating voltage of 10.0 KV and a working distance of 10.0 mm, the activated carbon was mounted on aluminum stubs using conductive glue and then coated with a thin layer of carbon paste tape on copper pegs and coated with a film of evaporated gold, prior to the observation.

UV-Visible spectroscopic analysis

A computer based UV-Vis spectrophotometer was used for the determination of concentration of samples. The system was switched on and warm up to 30 minutes, thoroughly clean quartz cuvettes was use. One of the cuvettes was fill with the reference compound and the other one with compound whose absorbance were measure at maximum wavelength. To get the relationship between concentration and absorbance of the compound, a calibration curve was plotted. Calibration solutions were made from standard solutions of known

concentration. The absorbance was plotted against concentration of the calibrated samples. These calibration curves was stored in the system itself and the concentration of the unknown sample was calculated directly from the absorbance.

Particle size distribution

Exactly 20 g of the prepared activated carbon was sieved using sieves of different mesh sizes (2 mm, 1 mm, 800 μm , 700 μm , 500 μm , 400 μm , 300 μm , 200 μm , 100 μm , 50 μm and pan) placed on electrical vibrator in descending order for 5 minutes and the fractions collected, weighed

Degradation of methylene blue solution

A 100 ml/L stock solution of methylene blue was prepared using distilled water for all the experiments.

Exactly 100 ml of solution of methylene blue solution was taken from the stock solution, put in a beaker; 2.0 g of Moringa husk activated carbon was added. The suspension was kept in a dark at room temperature with continuous stirring using magnetic stirrer. After an hour in the dark, an aliquot of 5 mL was taken from the beaker at interval of 10 minutes for 1 hour; the catalysts were filtered then analyzed using UV-Vis Spectrophotometer to evaluate the degradation of the methylene blue. Same procedure was repeated using Jatropha cactus activated carbon

RESULTS

Table 1: physicochemical properties of water sample from Hunkuyi Dam

Parameter assessed	Water samples	Permissible limit (WHO)
pH	11.12 \pm 1.24	6.0 – 9.0
Temperature ($^{\circ}\text{C}$)	36 \pm 1.30	<40
Electric conductivity ($\mu\text{S}/\text{cm}$)	3.03 \pm 0.57	2.0
Turbidity	6.35 \pm 0.69	5
Total dissolved solids (mg/L)	500 \pm 3.42	500
Total solids (mg/L)	270 \pm 2.89	200
Biochemical oxygen demand (mg/L)	37.7 \pm 1.92	30
Dissolved oxygen (mg/L)	37 \pm 0.55	10
Nitrate (mg/L)	20.0 \pm 2.03	20

Sulphate (mg/L)	86.2±3.90	500
Phosphate (mg/L)	4.32±0.69	5.0
Chromium (ppm)	0.48±0.04	0.5
Copper (ppm)	0.059±0.01	0.1
Zinc (ppm)	2.81±0.56	<1
Lead (mg/L)	0.085±0.006	0.05
Cadmium (mg/L)	0.036±0.0039	0.01

Characterization of Moringa husk and Jatropha cactus activated carbon

The activated carbon produced from Moringa husk and Jatropha cactus was characterized using proximate analysis (Table 2)

Table 2: Physicochemical Properties of Jatropha Cactus and Moringa Husk Activated Carbon

Parameter	Results	
	Moringa	Jatropha
pH	6.4	6.8
Moisture content (%)	14	15
Ash content (%)	4	4
Carbon content (%)	63.26	40.260
Volatile matter (%)	10	8
Surface area (m ² /g)	896	787
Electrical conductivity (µs/cm)	867	824
Bulk density (g/L)	400	397
Adsorption capacity of pb and cd (mg/g)	55.7 and 86	50.2 and 55.2
% adsorption of pb and cd	85 and 92	78 and 83

Table 3: Particle Size Distribution of Jatropha Cactus and Moringa Husks Activated Carbon

Mesh sizes (mm or μm)	Particle size distribution	
	Moringa(mm)	Jatropha (mm)
2mm	0.71	0.52
1mm	0.54	0.35
800 μm	2.35	2.22
700 μm	2.31	2.11
500 μm	2.20	2.06
400 μm	2.07	1.90
300 μm	2.00	1.80
200 μm	0.81	0.61
100 μm	0.17	0.42
50 μm	0.00	0.00
Pan	0.00	0.00

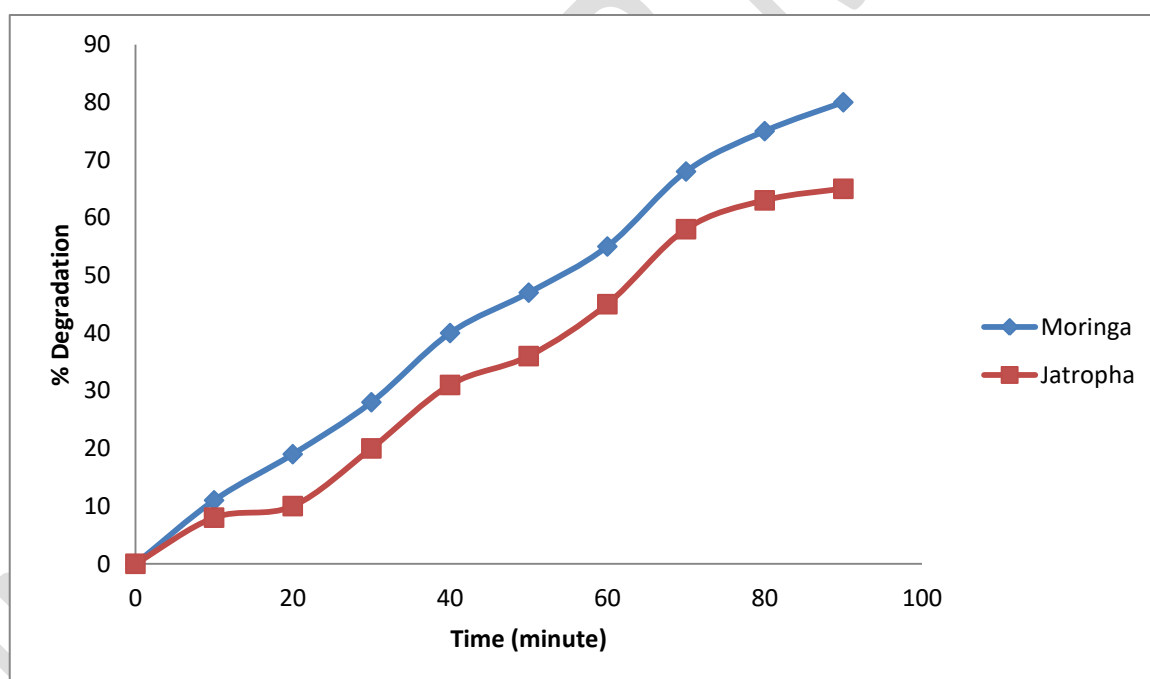


Figure 1: Percentage Degradation of Methylene Blue Using Moringa Husk and Jatropha Cacus Activated Carbon

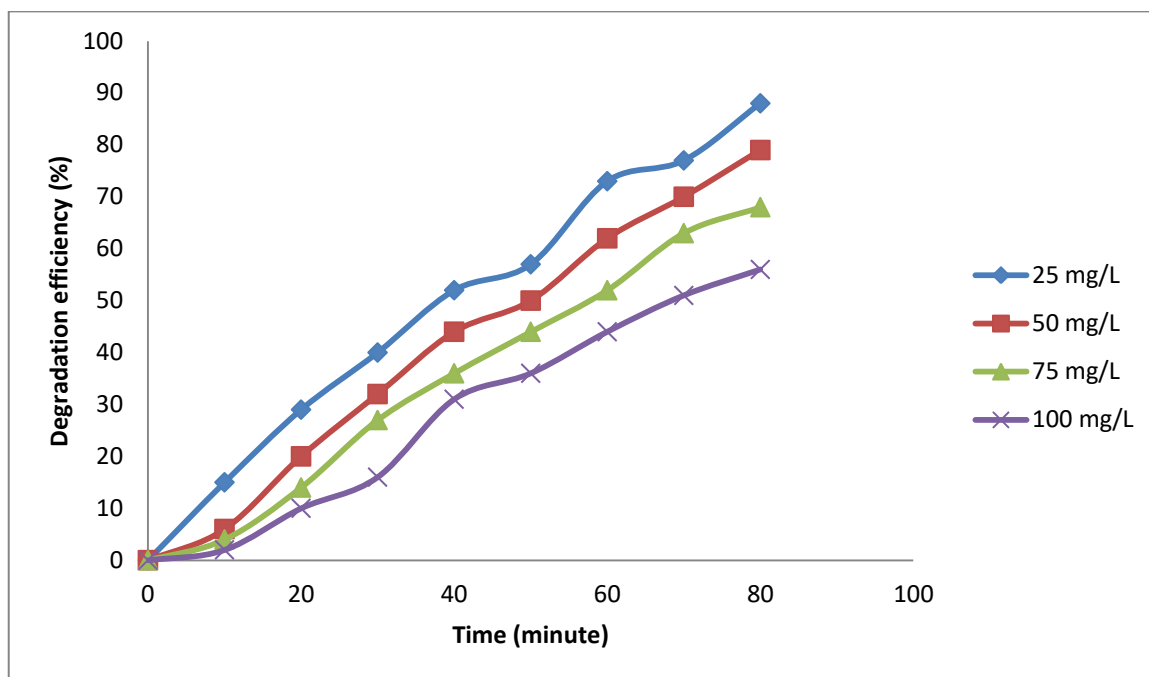


Figure 2: Effect of Methylene Blue Concentration on its Degradation using Moringa Husk Activated Carbon

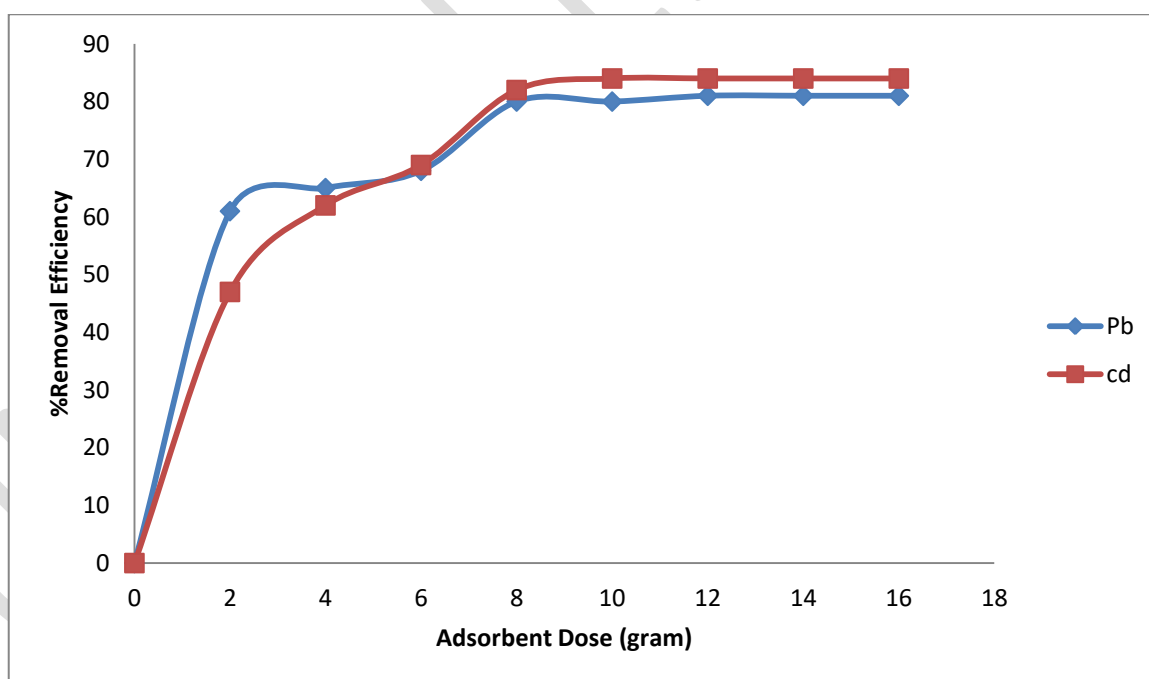


Figure 3: Efficiency of Lead (pb) and Cadmium (cd) Removal in Relation to Adsorbent Dose using Moringa Husk Activated Carbon

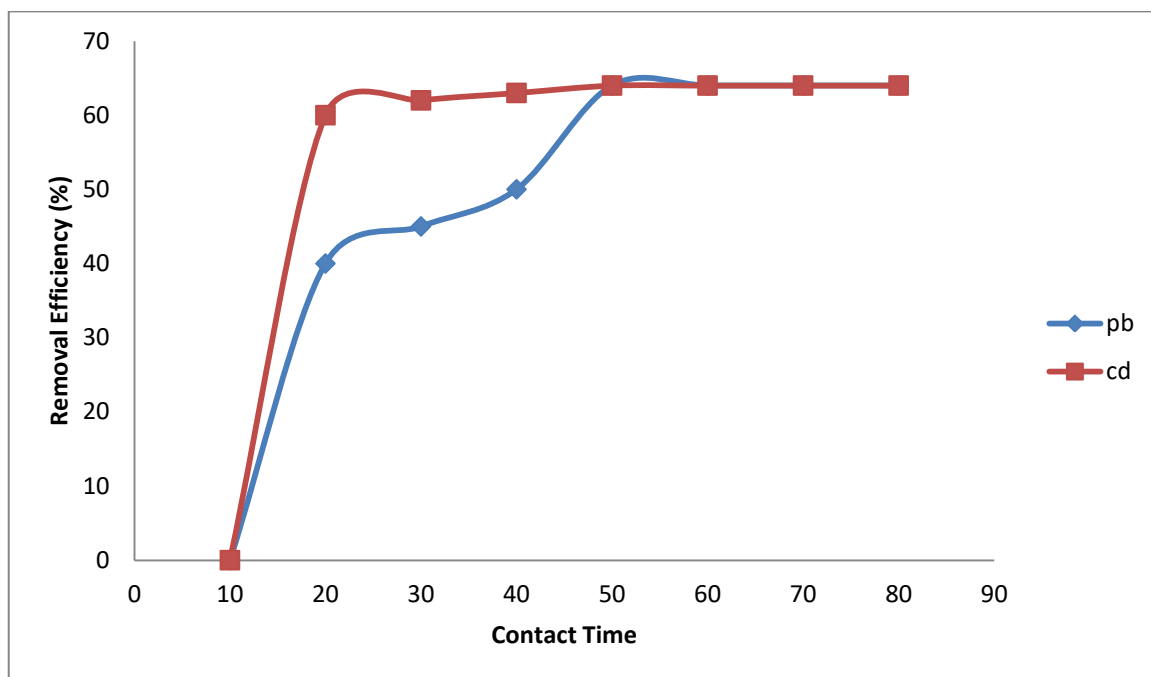


Figure 4: Percentage Removal of Lead (pb) and Cadmium (cd) Based on Contact Time Using Moringa Husk Activated Carbon

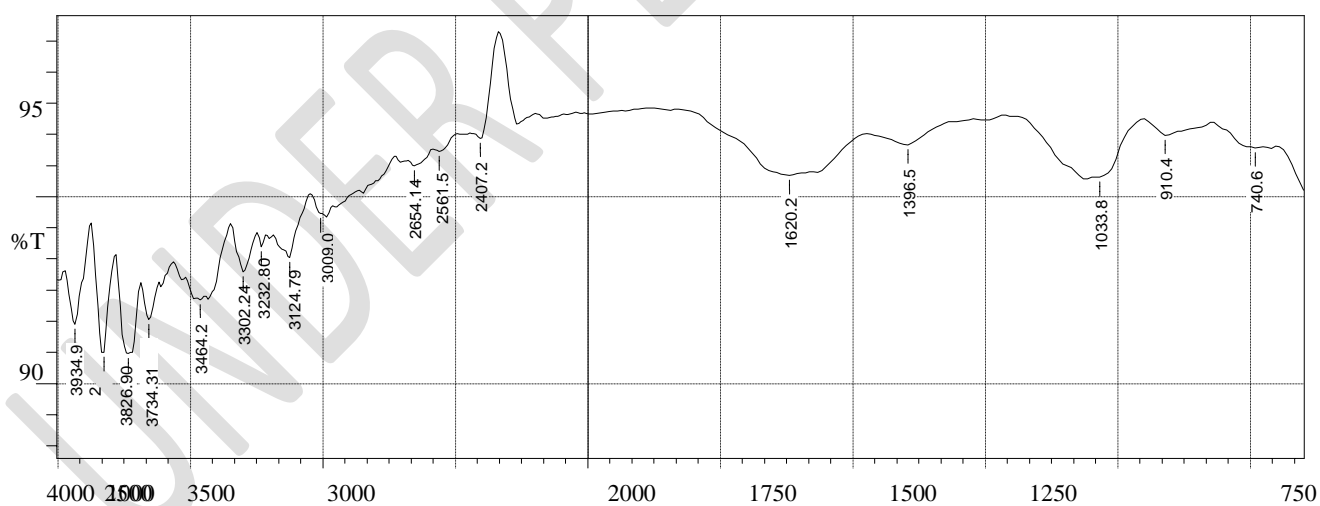


Figure 5: Fourier Transform Infrared (FTIR) Spectra of the Pure Moringa Husks

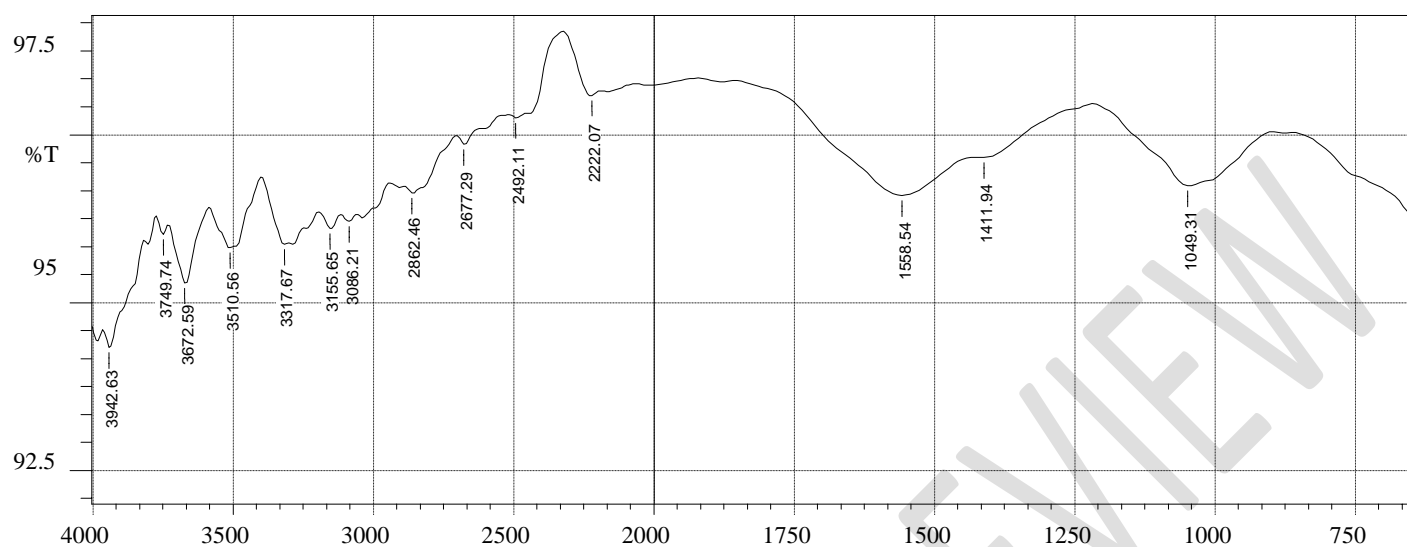


Figure 6: Fourier Transform Infrared (FTIR) Spectra of the Activated Moringa Husks



Plate 1: Image of Scanning Electron Microscope of (a) Pure Moringa husk (b) Activated Moringa husks

Table 4: Some Properties of Raw and Treated Water Sample from Hunkuyi Dam

Samples	pH	Turbidity (NTU)	TDS (mg/L)	BOD (mg/L)	COD (mg/L)	Pb (mg/L)	Cd (mg/L)
Raw	11.12	6.35	510	37.7	40.9	0.085	0.036
Treated via Jatropha cacus	10.03	5.50	489	34.5	36.7	0.06	0.015
Treated via Moringa husks	8.00	4.90	445	27.4	30.0	0.039	0.0071

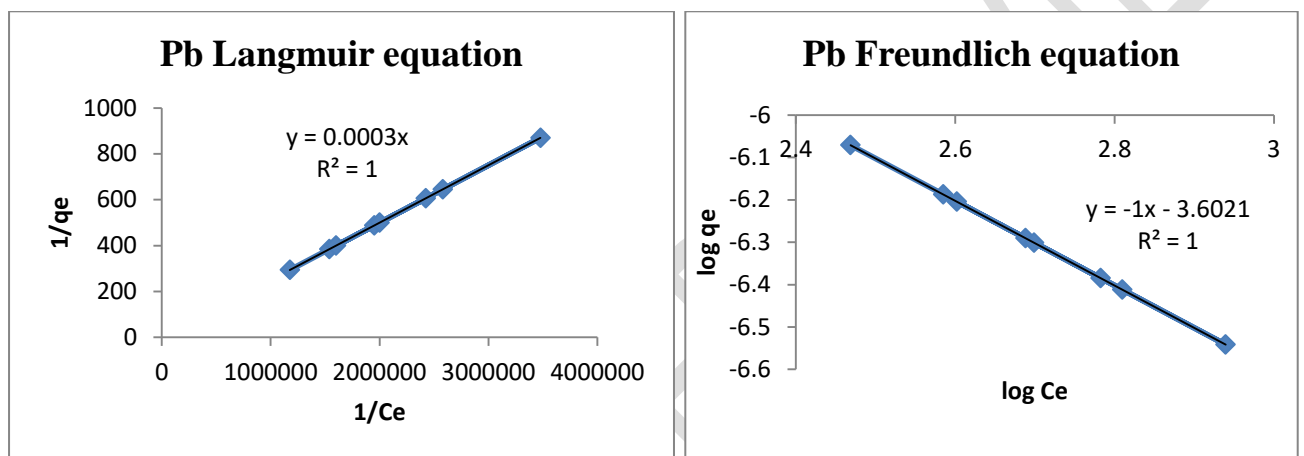


Figure 7: Application of Langmuir and Freundlich Equation for the Removal of Pb Using Moringa Activated Carbon

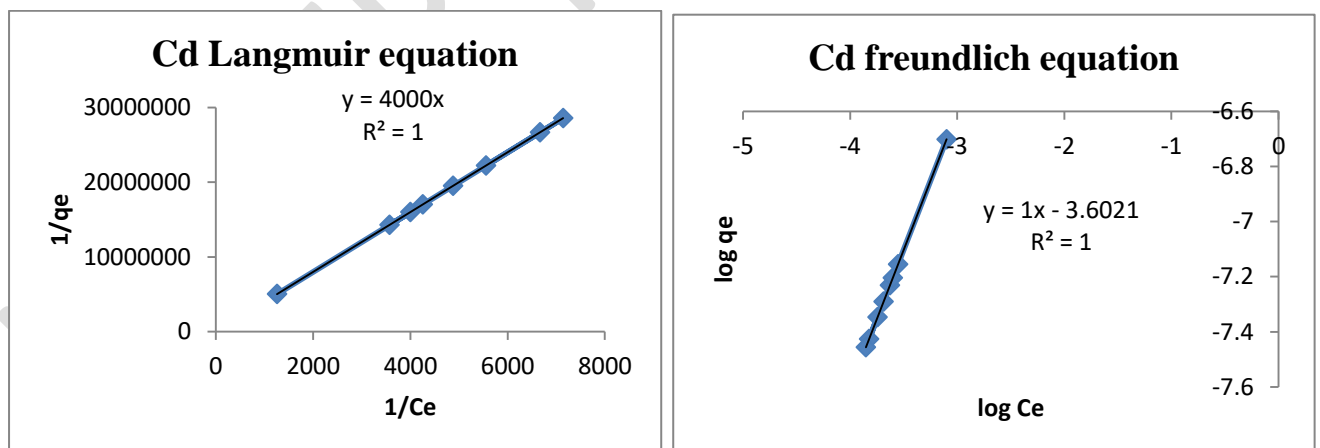


Figure 8: Application of Langmuir and Freundlich Equation for the Removal of Cd Using Moringa Activated Carbon

DISCUSSION

The physicochemical properties of water sample (Table 1) obtained from Hunkuyi dam exceeds the permissible limits set by World health organization (WHO, 2016) with the exception of temperature, total dissolved solids, nitrate, phosphate, sulphate, chromium and copper while cadmium and lead showed significantly high value. According to Naseem et al. (2014) revealed that drinking water contaminated with lead and cadmium above the recommendation limits can lead to renal failure, kidney diseases and even death

it was observed from the proximate analysis (Table 2) that the moisture, ash, carbon content and the volatile matter % of both the Moringa husks and Jatropha cactus are high, according to (Malik *et al.*, 2006) the high percentages of the moisture, ash, carbon and volatile matter can be due to the origin of the plants. The high absorption capacity of the lead and cadmium using moringa husk activated carbon can be attributed to the surface area, bulk density which are very high and the density of the generated activated carbon as it also play a vital role on adsorbate uptake. It was also observed that the pH of both the Moringa husk and Jatropha activated carbon were within the permissible limits set by World Health Organization

The performance of the moringa husk and jatropha cactus activated carbon was first evaluated using decoloration of methylene blue. Methylene blue is used as a text model in evaluating the activity of series of activated carbon (Disanto *et al.*, 1972). The figure (1) shows that Moringa activated carbon has high percentage of degradation than Jatropha cactus activated carbon for an instance, at 90 minutes moringa has 80 % degradation while Jatropha cactus has 65 % degradation of methylene blue respectively. Therefore moringa husk activated carbon has better performance in the removal of lead and cadmium from Hunkuyi dam than Jatropha cactus activated carbon

The effect of concentration of methylene blue on its degradation using Moringa husk activated carbon was investigated by varying the concentration of the methylene blue from 25 to 100 mg/L (Figure 2) which shows that the percentage removal of methylene blue decreased with increasing methylene blue concentration, when the concentration varied from 25 to 100 mg/L, the percentage degradation of methylene blue decreased from 88 % to 45 %. At higher concentration, the methylene blue molecules absorbed some of the incident radiation which will decrease the amount of available light photons that will drive the photocatalytic process (Jaafar *et al.*, 2012)

The effect of the different amount of Moringa activated carbon on its percentage removal of lead, Pb and cadmium, Cd was investigated by varying the concentration of the activated carbon from 2, 4, 6, 8, 10,

12, 14 and 16 grams. Figure 3 shows that the percentage removal of the lead, pb and cadmium, cd increase with increase in the adsorbent dose from 2 g to 10 g at 47 and 60 % to 82 and 84 % removal of lead, pb and cadmium, cd respectively however, the increases was sharply from 0 to 79 % in the case pb and 0 to 81 % in the case of cd at dose of 8 g but slower with further increment of dose until it remained contend, the significant slower of a sample containing increment of dose from 10 g to 16 g can be attributed to decreased in amount of dose absorbed per unit mass, similar trend was reported in the work of Aji M. M *et al.*, (2017)

The adsorption desorption equilibrium of the Moringa activated carbon was investigated on the Percent Removal Efficiency of pb and cd Based on Contact Time. Figure 4 shows that about 65 % removal of pb and cd was achieved in an hour. It also shows that the percentage removal remained constant at 60 – 80 minutes; this signified that equilibrium is reached at 60 minute in which is the maximum required time for the removal the lead, pb and the cadmium, cd. Similar trend was reported in the work of Aji M. M *et al.*, (2017). In batch adsorption, monolayer of adsorbate is normally formed on the surface of adsorbent and the rate of removal of adsorbate species from aqueous solution is controlled by the rate of transport of the species to the empty sites (Elaigwu *et al.*, 2010).

Fourier Transform Infrared Spectroscopy (FTIR) was used to identify the functional groups present in the pure and prepared activated Moringa husks used for the absorption of lead (Pb) and cadmium (Cd) (Figure 4 and 5). Each peak in the FTIR spectrum were assigned to respective functional group observed at 3934.9 – 1620.2 cm⁻¹, and 1396.5 cm⁻¹ (Figure 4), while, 3942.63 – 1049.31 cm⁻¹ (Figure 5) which can be assigned to alcohol, aldehyde, alkene and phenol respectively for the pure Moringa husks, while Alcohol, aldehyde, phenol and nitro-compound respectively for the activated Moringa husks. According to (Zheng *et al.*, 2014) functional groups present in a compound play a vital role on the absorption feature of the particular compound. Also according to (Fan and Wang, 2011) the chemical nature of the compound also an important factor in understanding the absorption process of a particular compound

The morphological characteristic of the pure and activated Moringa husks were investigated using Scanning Electron Microscope (SEM) analysis (plate 1a and b). Non compact arrangement of the non-particles with shape rice of which the particles are not aggregated being like shapes of small particles of wood with little or no pores making it difficult to determine it exact shape and sizes (plate 1a) this is also observed in the work of (Kim *et al.*, 2010), while plate 1b shows the microgram of the activated Moringa husks that most of the particles are aggregated and exhibited a compact arrangement in the form of rocks

The removal isotherms of the heavy metals: lead (Pb) and cadmium (Cd) were represented using Langmuir and Freundlich equations. The analysis of the data for the removal of Pb and Cd were

graphically shown in Figure 7 and 8 which shows that the kinetic isotherms of the Langmuir and Freundlich perfectly fitted and described the absorption processes of the lead (Pb) and cadmium (Cd) using activated carbon from Moringa husks. Both the Langmuir and Freundlich equations has the same correlation coefficient greater than 0.5, that is 1 which were well fitted in to isotherms equations equilibrium and also fitted better for sample of each adsorbate, this is also observed in the work of (Kehinde *et al.*, 2008), also in the work of (Mohammed *et al.*, 2015) which showed that the Langmuir isotherms has better adsorption equilibrium than the Freundlich isotherm equation in the removal of iron (Fe) and manganese (Mn). Under adsorption process the plot of Langmuir equation usually predicts the favorability of a system in batch processes which is normally described by separation factor (Anirudhan *et al.*, 2008)

Conclusion

Moringa husks and Jatropha cactus were activated for removal of lead and cadmium in water sample but was evaluated using decoloration of methylene blue. The results obtained shows that Moringa has better properties: physicochemical properties, particle size distribution, adsorption of lead and cadmium than the activated Jatropha cactus. The Moringa husks was then characterized using Fourier Transform Infrared (FTIR), Scanning Electron Microscope (SEM) and its adsorption properties were then studied by Langmuir and Freundlich kinetic isotherms. The serves as a means of converting agricultural waste in to useful materials

REFERENCES

- Abaliwano, K. J Ghebremicheal, A. K and Amy, L. G. (2008). Application of purified moringa oleifera. WaterMill Working Paper Series, no. 5
- Abou El-Hassan, W. H., Moatafa, M. M., Fujimaki, H., Inoue, M. (2009). Irrigation improvement assessment from the water quality and human health perspective in the Nile Delta. *Journal of Food, Agriculture and Environment*, 7, 815 -822

- Aji, M. M. Gutti, B and Highina, B. K. (2017). Production and Characterization of Activated Carbon (AC) From Groundnut Shell and Its Application in Water Treatment. *University of Maiduguri Faculty of Engineering Seminar Series*. 8: 91 – 98.
- Alfarra, M. R. Good, N. Wyche, K. P. Hamilton, J. F. Monks, P. S. Lewis, A. C. and McFiggans, G. (2014). Water uptake is independent of the inferred composition of secondary aerosols derived from multiple biogenic VOCs, *Journal of Atmos. Chem. Phys*, 13, 11769 -11789
- Anirudhan, T. S. and Radhakrishnan, P. G. (2008). Thermodynamics and kinetics of Adsorption of Cu(II) from Aqueous Solutions onto a New Cation Exchnager Derived from Tamarind Fruit Shell. *The Journal of Chemical Thermodynamics*. 40, 702 – 709
- Daneshvar, N. Aber, S. Dorraji, M. S. Khataee, A. R. and Rasoulifard, M. H. (2007). Photocatalytic degradation of the insecticide diazinon in the presence of prepared nanocrystalline ZnO powders under irradiation of UV-C light. *Journal of Separation and Purification Technology*. 58: 91 – 98.
- Elaigwu S. E., Usman L. A., Awolola G. V., Adebayo G. B., and Ajayi R. M. K. (2010). Adsorption of Pb (II) from Aqueous Solution by Activated Carbon Prepared from Cow Dung. *Environmental Research Journal*, 4(4): 257-260
- Fan, I. Chen, Y. and Wang, L. (2011). Adsorption of pb (II) irons from aqueous solutions by pyrolusite modified activated carbon prepared from sewage sludge. *Adsorption Science Technology*. 29: 495 – 506.
- Hameed, B.H. (2009). Evaluation of Papaya Seed as a Novel Non-Conventional Low-Cost Adsorbent for Removal of Methylene Blue. *Journal of Hazardous Material*. 162, 939- 944
- Kehinde, A. A. Babalola, J.O. and Babarinde, A. A. N. (2008). Kinetic, Isotherm and Thermodynamic Studies of the Biosorption of Cadmium (II) by Snail (*Lymnaea rufescens*) Shell *Journal of Applied sciences Reseach*, 4(11): 1420-1427.
- Kim, T. Y. Lee, Y. Park, K. Kim, S. J and Cho, S. Y. (2010). A study of photocatalysis of TiO₂ coated on to chitosan beads and activated carbon. *Research on Chemical Interface*, 31: 343-358.
- Mohammed, M. A. Babagana, G. and Bitrus K. H. (2015). Production and Characterization of Activated Carbon from Groundnut Shell Sourced in Maiduguri, Borno state. *Columban Journal of Life Sciences*, Vol 17, No 1, page 18 - 24

- Naseem, S., Hamza, S., Bashir, E., Pirzada, T., Talpur, M. M. (2014). Trans element geochemistry of groundwater winder, Balochitan, Pakistan and its appraisal for irrigation water quality. *British Journal of Applied Science and Technology*, 3, 182 -198
- Organization for Economic Co-operation and Development (OECD) (2006). Report on better policies to improve the environmental performance of the agriculture sector. Page 26
- Pan, J. A., Plant, J. A., Voulvoulis, N., Oates, C. J., Ihlenfeld, C. (2010). Cadmium levels in Europe. Implication for human health. *Environmental Geochemistry and Health*, 32, 1-12.
- Rao, K. S. Mohapatra, M. Anand, S and Venkateswarlu P (2010). Review on cadmium removal from aqueous solutions. *International Journal of Engineering, Science and Technology*. 2, 81 – 103
- Rengaraj, S. Seung, H. M. and Sivabalm, S. (2002). Agricultural solid waste for the removal of organics: adsorption of phenol from water and wastewater by palm seed coat activated carbon, *Waste Management*, 22, 543 - 548
- Salim, R. Al-subu, M. and Dawood, E. (2008). Efficiency of removal of cadmium from aqueous solution by plant leaves and effects of interaction of combinations of leaves on their removal efficiency. *Journal of Environmental Managment*. 87, 521- 532
- Satya, N. Ojha, C. S. P. Mishra, S.K. Chaube, U. C. and Sharma, P. K. (2011). Cadmium and chromium removal by aquatic plant. *International Journal of Environmental Science*, 1, 8
- Teng H. J. and Lin, H. C. (1998). Activated carbon production from low ash subbituminous coal with CO₂ activation. *American Institute of Chemical Engineering Journal*, 44(5): 1170 – 7
- Warhust, A. M. McConnachie, G . L. and Pollard, S. J. (1997). Characterization and application of activated carbon produced from Moringa oleifera see husks by single-step steam pyrolysis. *Water Research*, 31(4): 759 -766
- World Health Organization (2016). Model List of Essential Medicines (19th List)" (PDF). World Health Organization. April 2015. Archived (PDF) from the original on 13 December 2016. Retrieved 8 December 2016. pp. 45.
- Zheng, X. Jin, X. Zhenzhen, W. and Weihao, L. (2014). Removal of Iron and Manganese in Steel Industry Drainage by Biological Activated Carbon. *Desalination and Water Treatment*. 20: 682 - 963

UNDER PEER REVIEW